

Peel & Stick Appliqué Antenna, 420 – 450 MHz




Features


- O 420 450 MHz operational bandwidth
- O Low visibility from outside vehicle
- Ideal for mounting on non-metallic, low-loss materials such as glass, fiberglass, polyethylene, polycarbonate, and other plastics
- O Easily adheres to surface
- Quick installation (< 1 minute)
- Electrically small antenna
- Other connector options available


Characteristics

Model Number	AA-420-450
Frequency	420 – 450 MHz
Gain	-3.8 dBi
Pattern	Near omni
Polarization	Vertical
VSWR	< 2:5:1
Nominal Impedance	50 Ohms
Size	2.8" × 2.5"
Cable Length	17.5"
Weight	0.2 oz
Connector Type	SMA



Radiation Patterns



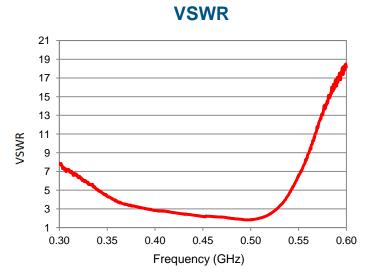

octane is a division of Pharad, LLC. Octane is a registered trademark of Pharad, LLC. Specifications subject to change without notice.

1340 Charwood Road, Suite L · Hanover, MD 21076 · phone 410-590-3333 · email info@octanewireless.com www.octanewireless.com

5/2013 Document Number: 900165